



PDF-XCHANGE



PDF-XChange Editor Simple USER MANUAL

Head Office:

PDF-XChange Co. Ltd,
P.O. Box 79,
9622 Chemainus Road,
Chemainus, British Columbia
V0R 1K0
Canada

Sales:

Tel: (+00) 1-250-324-1621
Fax: (+00) 1-250-324-1623
sales@pdf-xchange.com
<https://www.pdf-xchange.com>

In Europe:

PDF-XChange Co. Ltd,
Horsmanshoad,
Pickwell Lane,
Bolney, West Sussex
RH17 5RH
United Kingdom

Sales:

Tel: (+00) 1-250-324-1621
Fax: (+00) 1-250-324-1623
sales@pdf-xchange.com
<https://www.pdf-xchange.com>

Copyright:

PDF-XChange is an internationally-registered trademark. International registration number: 1461163.
© 2025. All rights reserved.

1. Welcome	4
1.1 Introduction	5
1.2 Installation	7
1.2.1 System Requirements	8
2. Functions	9
2.1 PXCv_CheckPassword	10
2.2 PXCv_Delete	11
2.3 PXCv_DrawPageToDC	12
2.4 PXCv_DrawPageToDIBSection	14
2.5 PXCv_DrawPageToIStream	16
2.6 PXCv_FinishReadDocument	18
2.7 PXCv_GetDocumentInfoW	19
2.8 PXCv_GetPageDimensions	21
2.9 PXCv_GetPageRotation	23
2.10 PXCv_GetPagesCount	25
2.11 PXCv_GetPermissions	26
2.12 PXCv_Init	27
2.13 PXCv_ReadDocumentFromIStream	29
2.14 PXCv_ReadDocumentFromMemory	30
2.15 PXCv_ReadDocumentW	32
2.16 PXCv_ReleaseCachedData	34
2.17 PXCv_ReleasePageCachedData	36
2.18 PXCv_SetCallBack	38
2.19 PXV_CommonRenderParameters	40
2.20 PXV_DrawToImageParams	46
3. Error Handling	48
3.1 Error Codes	49
3.2 PXCv_Err_FormatFacility	54
3.3 PXCv_Err_FormatSeverity	56
3.4 PXCv_Err_FormatErrorCode	58
Index	61

1 Welcome



PDF-XChange Editor Simple SDK V10 Manual

Welcome to the **PDF-XChange Editor Simple SDK V10** user manual. Use the **Table of Contents** on the left to browse the topics of this manual. Click topics to expand them.

We offer several further cutting-edge applications for the manipulation of PDF and image files. See the [PDF-XChange Products Page](#) for more information.

If you have any queries then please [Contact Us](#). We aim to respond to all communication within eight hours - and we are usually much faster. Additionally, the [User Forums](#) are an excellent resource for troubleshooting, and our [Knowledgebase](#) contains over four hundred articles about our software and other relevant information.

Examples and sample apps for this SDK and others are available [here](#).

This manual is broken down into the following sections:

- The [Welcome](#)^[4] section contains [Installation](#)^[7] information and [System Requirements](#)^[8].
- The [Functions](#)^[9] section details all functions that the **PDF-XChange Editor Simple SDK** can be used to achieve.
- The [Error Handling](#)^[48] section details all error codes that may appear within **PDF-XChange Editor Simple SDK**.

A PDF version of this manual is available [here](#).

1.1 Introduction



Introduction

The **PDF-XChange Editor Simple SDK V10** installs via **DLL** and enables the basic viewing/printing of PDF documents within developer applications. Developers who require the use of all [PDF-XChange Editor](#) features within their applications should purchase the full **PDF-XChange Editor SDK**, which is available at the link below.

Additional developer kits are available from **PDF-XChange** to create, view, edit and manipulate PDF documents. They include:

- The [PDF-XChange Core API SDK](#), which provides developers with libraries and API for the creation and manipulation of fully-native, industry standard PDF files.
- The [PDF-XChange Editor SDK](#), which enables the incorporation of a fully-licensed version of [PDF-XChange Editor](#) into developers' applications.
- The [PDF-XChange PRO SDK](#) bundle, which combines the features of the [PDF-XChange Drivers API SDK](#) and the [PDF-XChange Core API SDK](#). This **SDK** also features a programmatic OCR module and access to its library DLL functions - including the creation of programmatic, fillable forms and digital signature capabilities.

See [here](#) for further information about our developer products and a comprehensive list of available applications.

Please note:

- The **PDF-XChange Editor Simple SDK** is not a royalty-free tool kit. A fixed amount of licenses are included in each SDK product. Additional bulk-license packs are available - see [here](#) for further information.
- This toolkit must not be used to develop toolkits/components for non-licensed developers.
- The license agreement contains all relevant terms and conditions of use. If there is any uncertainty about whether the intended use would be in breach of license then please [Contact Us](#) for clarification. Our terms of licensing are flexible and we can often tailor them to meet the specific needs of our clientele.
- We recommend experimenting with the evaluation version prior to purchase. Evaluation versions are fully functional, but watermarks will be included on output pages. This means that

applications can be fully developed before a purchase is made. When a licensed version is purchased all output becomes watermark-free. Our hope is that this can guarantee satisfaction as we cannot offer refunds once a purchase has taken place.

Licensing

Please use [PXCv_Init](#)^[27] to add your registration key to the product.

Support

- Our [Developer Forums](#) are an excellent resource for troubleshooting.
 - The [Adobe Website](#) is a very useful resource for developers working on PDF-related applications.
 - **PDF-XChange** also provides SDKs for the creation/manipulation of PDF and raster image files, as well as an SDK for virtual printer driver functionality. See [here](#) for further information.
-

1.2 Installation



Installation

Click [here](#) to download the **PDF-XChange Editor Simple SDK V10**. The installation folder contains the following items:

- A PDF version of the **PDF-XChange Editor Simple SDK** manual.
- A PDF version of the **PDF-XChange Editor Simple SDK** user license.
- An examples folder of the **PDF-XChange Editor Simple SDK** utilized in the following programming languages:
 - **C#**
 - **C/C++**
 - **Delphi**
 - **Visual Basic**
 - **Visual Basic.NET**

Redistribution

The **PDF-XChange Editor Simple SDK** depends on only the **pxcview.dll**. Additional **SDK** components from **PDF-XChange** applications are not required. However, the **Microsoft® GDI+** must be installed on the operating system of the local machine in order to enable vector printing. The **Microsoft® GDI+** is installed by default on all version of windows from **Windows XP**. Therefore, if an earlier version is being used, then **Microsoft® GDI+** must be installed. Additionally, **PDF-XChange Editor** is compatible with only **Windows 2000** and later - earlier versions are not supported.

1.2.1 System Requirements



System Requirements

The **PDF-XChange Editor Simple SDK** supports all **Windows** (32/64 bit) operating systems from **Windows 7** and later. Please note the following:

- All versions from **V4** to **V10** are **Microsoft/Citrix Terminal Server** compatible.
 - All versions from **V5** to **V7** are **Windows XP/Vista** compatible.
 - We recommend that users install the latest **Microsoft Windows** service packs and updates before using our products, as doing so will ensure the greatest possible performance of the software.
 - Our products - in particular the printer drivers that **PDF-XChange Standard** and **PDF-XChange Lite** utilize - are not designed to work in virtualized environments such as the **XenApp** software.
 - There are some limitations to product support for **Windows XP** as **Microsoft** have stopped supporting it. Further information about this issue is available [here](#).
 - If you are using **Windows 7** then please ensure you have the latest release and all available fixes - otherwise you may encounter issues, as detailed [here](#).
-

2 Functions



Functions

The following functions are available in the **PDF-XChange Editor Simple SDK**:

- [`PXCV\_CheckPassword`^{\[10\]}](#) validates the supplied password against the current document.
- [`PXCV\_Delete`^{\[11\]}](#) releases the PDF object that [`PXCV\_Init`^{\[27\]}](#) created.
- [`PXCV\_DrawPageToDC`^{\[12\]}](#) draws specified pages to a device context.
- [`PXCV\_DrawPageToDIBSection`^{\[14\]}](#) creates a **Windows** graphics device interface DIB section from document pages.
- [`PXCV\_DrawPageToStream`^{\[16\]}](#) renders the specified page and saves it to the stream object.
- [`PXCV\_FinishReadDocument`^{\[18\]}](#) completes the reading of encrypted documents when [`PXCV\_ReadDocumentW`^{\[32\]}](#) returns [`PS\_ERR\_DocEncrypted`^{\[50\]}](#) and [`PXCV\_CheckPassword`^{\[10\]}](#) supplied the correct password.
- [`PXCV\_GetDocumentInfoW`^{\[19\]}](#) retrieves information from the info dictionary of documents.
- [`PXCV\_GetPageDimensions`^{\[21\]}](#) retrieves page dimensions.
- [`PXCV\_GetPageRotation`^{\[23\]}](#) retrieves the rotation angle of pages.
- [`PXCV\_GetPagesCount`^{\[25\]}](#) retrieves the page count of documents.
- [`PXCV\_GetPermissions`^{\[26\]}](#) extracts the encryption level and permission settings of documents.
- [`PXCV\_Init`^{\[27\]}](#) creates a PDF object.
- [`PXCV\_ReadDocumentFromStream`^{\[29\]}](#) uses an **Istream** interface to read documents.
- [`PXCV\_ReadDocumentFromMemory`^{\[30\]}](#) reads documents from memory buffers.
- [`PXCV\_ReadDocumentW`^{\[32\]}](#) reads documents from specified PDF files.
- [`PXCV\_ReleaseCachedData`^{\[34\]}](#) releases cached document data.
- [`PXCV\_ReleasePageCachedData`^{\[36\]}](#) releases cached data for individual document pages.
- [`PXCV\_SetCallBack`^{\[38\]}](#) sets the callback function used during the process of PDF rasterization.
- [`PXCV\_CommonRenderParameters`^{\[40\]}](#) defines drawing parameters for the functions [`PXCV\_DrawPageToDC`^{\[12\]}](#) and [`PXCV\_DrawPageToDIBSection`^{\[14\]}](#).

Please note that all functions and their parameters are case-sensitive.

2.1 PXCv_CheckPassword



PXCv_CheckPassword

PXCv_CheckPassword validates the supplied password against the current document, and should be called when [PXCv_ReadDocumentW](#)^[32] returns [PS_ERR_DocEncrypted](#).^[50]

```
HRESULT PXCv_CheckPassword(  
    PXVDocument Doc,  
    BYTE* pPassword,  
    DWORD PassLen  
);
```

Parameters

Doc

[in] Specifies a document that [PXCv_Init](#)^[27] created.

pPassword

[in] Specifies a pointer to a buffer that contains password data. (Buffers may contain zero '\0' symbols if desired).

PassLen

[in] Specifies the buffer length.

Please note that all functions and parameters are case-sensitive.

Return Values

If the function succeeds then the return value is **1** in the case of user passwords and **2** in the case of owner passwords.

If the function fails then the return value is an [error code](#).^[49]

2.2 PXCv_Delete



PXCv_Delete

PXCv_Delete releases the PDF object that [PXCv_Init](#)^[27] created, and must be called once the object is no longer required/all updates are complete.

```
HRESULT PXCv_Delete(  
    PXVDocument Doc  
) ;
```

Parameters

Doc

[in] Specifies a document that [PXCv_Init](#)^[27] created.

Please note that all functions and parameters are case-sensitive.

Return Values

If the function succeeds then the return value is DS_OK.

If the function fails then the return value is an [error code](#).^[49]

2.3 PXCv_DrawPageToDC



PXCv_DrawPageToDC

PXCv_DrawPageToDC draws specified pages to a device context.

```
HRESULT PXCv_DrawPageToDC (
    PXVDocument Doc,
    DWORD page_num,
    HDC hDC,
    LPPXV_CommonRenderParameters pParams
);
```

Parameters

Doc

[in] Specifies a document that [PXCv_Init](#)^[27] created.

page_num

[in] Specifies the zero-based page number to be drawn.

hDC

[in] Specifies the handle of the device context onto which page information is drawn.

pParams

[in] Pointer to the [PXV_CommonRenderParameters](#)^[40] structure that defines drawing parameters.

Please note that all functions and parameters are case-sensitive.

Return Values

If the function fails then the return value is an [error code](#).^[49]

If the function succeeds then the return value is DS_OK or a different value that isn't an error code.

Example (C++)

```
HRESULT DrawPageThumbnail(PXVDocument pDoc, DWORD page_num, LPCRECT thumb_bound_rect, HDC dc)
{
    HRESULT hr;
    double pw, ph;
    hr = PXCXV_GetPageDimensions(pDoc, page_num, &pw, &ph);
    if (IS_DS_FAILED(hr))
        return hr;
    // calculation rect of thumbnail in pixels
    // (fitting page proportional into thumb_bound_rect)
    LONG tbw = thumb_bound_rect->right - thumb_bound_rect->left;
    LONG tbh = thumb_bound_rect->bottom - thumb_bound_rect->top;
    LONG tw = tbw;
    LONG th = tbh;
    double z1 = (double)tw / pw;
    double z2 = (double)th / ph;
    if (z1 >= z2)
    {
        tw = (LONG)(z2 * pw + 0.5);
    }
    else
    {
        th = (LONG)(z1 * ph + 0.5);
    }
    RECT thumb_rect;
    thumb_rect.left = thumb_bound_rect->left + (tbw - tw) / 2;
    thumb_rect.top = thumb_bound_rect->top + (tbh - th) / 2;
    thumb_rect.right = thumb_rect.left + tw;
    thumb_rect.bottom = thumb_rect.top + th;
    // now filling PXV_CommonRenderParameters structure
    PXV_CommonRenderParameters crp;
    crp.WholePageRect = &thumb_rect;
    crp.DrawRect = NULL; // because we will draw whole page. It is equal to: crp.DrawRect
    crp.Flags = 0; // should be zero as specified
    crp.RenderTarget = pxvrm_Viewing;
    hr = PXCXV_DrawPageToDC(pDoc, page_num, dc, &crp);
    return hr;
}
```

2.4 PXCv_DrawPageToDIBSection



PXCv_DrawPageToDIBSection

PXCv_DrawPageToDIBSection creates a **Windows** graphics device interface DIB section from document pages.

```
HRESULT PXCv_DrawPageToDIBSection(  
    PXVDocument Doc,  
    DWORD page_num,  
    LPPXV_CommonRenderParameters pParams,  
    HDC hBaseDC,  
    COLORREF backcolor,  
    HBITMAP* pResDIBSection,  
    HANDLE hSection,  
    DWORD dwOffset  
);
```

Parameters

Doc

[in] Specifies a document that [PXCv_Init](#)^[27] created.

page_num

[in] Specifies the zero-based page number to be drawn.

pParams

[in] Pointer to the [PXV_CommonRenderParameters](#)^[40] structure, which defines drawing parameters. Please note that this function ignores the [pxvrpf_UseVectorRenderer](#)^[41] flag contained in the *Flags* field of [PXV_CommonRenderParameters](#).^[40]

hBaseDC

[in] Handle of the device context used to create DIB sections. This parameter can be set to NULL if desired.

backcolor

[in] Specifies the background color. The most significant byte is used as the transparency value. **0** is full transparency and **255** is no transparency.

pResDIBSection

[out] Pointer to the **HBITMAP** variable that receives the DIB section handle.

hSection

[in] Handle of the file-mapping object used to create the DIB section. This parameter can be set to NULL if desired. See [CreateDIBSection](#) for further information about this parameter.

dwOffset

[in] Specifies the offset from the the beginning of the object that *hSection* references to where storage of the bitmap bit values begin. This value is ignored if *hSection* is NULL. Please note that the bitmap bit values are aligned on doubleword boundaries, therefore the offset must be a multiple of the size of a DWORD .

Please note that all functions and parameters are case-sensitive.

Return Values

If the function fails then the return value is an [error code](#).⁴⁹

If the function succeeds then the return value is DS_OK, or a different value that isn't an error code.

2.5 PXCv_DrawPageToIStream



PXCv_DrawPageToIStream

PXCv_DrawPageToIStream renders the specified page and saves it to the stream object.

```
HRESULT PXCv_DrawPageToIStream(  
    PXVDocument Doc,  
    DWORD page_num,  
    LPPXV_CommonRenderParameters pParams,  
    COLORREF backcolor,  
    LPPXV_DrawToImageParams pImageParams,  
    IStream* pDest  
);
```

Parameters

Doc

[in] Specifies a document that [PXCv_Init](#)^[27] created.

page_num

[in] Specifies the zero-based page number to be rendered.

pParams

[in] Pointer to the [PXV_CommonRenderParameters](#)^[40] structure, which defines drawing parameters.

backcolor

[in] Specifies the color used to fill the background before pages are rendered. The most significant byte is used as the transparency value. **0** is full transparency and **255** is no transparency.

pImageParams

[in] Pointer to the [PXV_DrawToImageParams](#)^[46] structure, which defines the parameters of generated image files.

pDest

[in] Pointer to the **IStream** object where images that this function creates are stored.

Please note that all functions and parameters are case-sensitive.

Return Values

If the function fails then the return value is an [error code](#).⁴⁹

If the function succeeds then the return value is DS_OK, or a different value that isn't an error code.

Example (C++)

```
HRESULT DrawPageToPNG(PXVDocument pDoc, DWORD page_num, LPCWSTR sFileName)
{
    HRESULT hr = S_OK;

    RECT rect;
    PXV_CommonRenderParameters crp = {0};    // common render parameters - used to specify
                                              // which size should rasterised (in our example)
                                              // also defines different render options
    PXV_DrawToImageParams dip = {0};         // specify resulting image parameters, like format, etc.

    IStream* pImage = NULL;                  // in real app it will be the stream where image should be stored

    // lets create a stream on file where our rendered image will be stored
    hr = SHCreateStreamOnFile(sFileName, STGM_CREATE | STGM_READWRITE, &pImage);
    // lets specify parameters for rendering
    rect.left = 0; rect.top = 0;
    rect.right = 600; rect.bottom = 800;
    crp.WholePageRect = &rect;
    crp.DrawRect = &rect;
    crp.Flags = pxvrpf_EmbeddedFontAsCurves | pxvrpf_NoTransparentBkgnd;
    crp.RenderTarget = pxvrn_Exporting;
    dip.ImageFormat = IMGF_PNG;
    dip.Flags = 0;    // reserved
    dip.Bpp = 24;

    // rendering
    hr = PXCV_DrawPageToIStream(pDoc, 0, &crp, RGB(255, 255, 255) | 0xFF000000, &dip, pImage);

    pImage->Release();
    return hr;
}
```

2.6 PXCv_FinishReadDocument



PXCv_FinishReadDocument

PXCv_FinishReadDocument completes the reading of encrypted documents when [PXCv_ReadDocumentW](#)^[32] returns [PS_ERR_DocEncrypted](#)^[50] and [PXCv_CheckPassword](#)^[10] supplied the correct password.

```
HRESULT PXCv_FinishReadDocument(  
    PXVDocument Doc,  
    DWORD Flags  
);
```

Parameters

Doc

[in] Specifies a document that [PXCv_Init](#)^[27] created.

Flags

[in] This parameter is reserved for future use and should be set to 0.

Please note that all functions and parameters are case-sensitive.

Return Values

If the function succeeds then the return value is DS_OK.

If the function fails then the return value is an [error code](#).^[49]

Comments

This function should be called only when [PXCv_ReadDocumentW](#)^[32] returns [PS_ERR_DocEncrypted](#)^[50] and [PXCv_CheckPassword](#)^[10] supplied the correct password. If calls to [PXCv_ReadDocumentW](#)^[32] are successful then there is no need to call this function.

2.7 PXCv_GetDocumentInfoW



PXCv_GetDocumentInfoW

PXCv_GetDocumentInfoW retrieves information from the info dictionary of documents. (The information retrieved is the same as that displayed when files are right-clicked and the **Properties** option is selected).

```
HRESULT PXCv_GetDocumentInfoW(  
    PXVDocument Doc,  
    LPCSTR name,  
    LPWSTR value,  
    DWORD* valuebuflen  
);
```

Parameters

Doc

[in] Specifies a document that [PXCv_Init](#)^[27] created.

name

[in] Pointer to an ASCII string that defines the information key (**Title, Author, Subject** etc) for the value to be retrieved. Please note that this parameter is case-sensitive and incompatible with UNICODE.

value

[in/out] Specifies a pointer to a buffer where retrieved information is placed. If this parameter is set to NULL then the required buffer size will be placed in *valuebuflen*. Buffer sizes are given in characters.

valuebuflen

[in/out] Specifies an available buffer size. Buffer sizes are given in characters, and a null-terminating character is included. If *value* is NULL then *valuebuflen* will write the required buffer size in characters. If *value* is not NULL then *valuebuflen* will write the character count, including a null-terminating character, and place it into a buffer.

Please note that all functions and parameters are case-sensitive.

Return Values

If the function fails then the return value is an [error code](#).^[49]

If the function succeeds then the return value is `DS_OK`, or a different value that is not an error code.

Example (C++)

```
LPCWSTR GetAuthor(PXVDocument Doc)
{
    LPWSTR res = NULL;
    DWORD sz = 0;
    HRESULT hr = PXCX_GetDocumentInfoW(Doc, "Author", res, &sz);
    if (IS_DS_FAILED(hr) || (sz == 0))
        return res;
    res = new WCHAR[sz + 1];
    PXCX_GetDocumentInfoW(Doc, "Author", res, &sz);
    return res;
}
```

2.8 PXCv_GetPageDimensions



PXCv_GetPageDimensions

PXCv_GetPageDimensions retrieves page dimensions in points.

```
HRESULT PXCv_GetPageDimensions (  
    PXVDocument Doc,  
    DWORD page_num,  
    double* width,  
    double* height  
);
```

Parameters

Doc

[in] Specifies a document that [PXCv_Init](#)^[27] created.

page_num

[in] Specifies the zero-based page number for which to retrieve dimensions.

width

[out] Pointer to a double variable that receives the width of the page. The measurement returned is the width (in points) of the crop box.

height

[out] Pointer to a double variable that receives the height of the page. The measurement returned is the height (in points) of the crop box.

Please note that all functions and parameters are case-sensitive.

Return Values

If the function fails then the return value is an [error code](#).^[49]

If the function succeeds then the return value is DS_OK, or a different value that isn't an error code.

Example (C++)

```
HRESULT GetPageDimInPixels(PXVDocument pDoc, DWORD page_num, DWORD dpi, SIZE* dims)
{
    double pw, ph;
    HRESULT hr = PXCX_GetPageDimensions(pDoc, page_num, &pw, &ph);
    if (IS_DS_SUCCESSFUL(hr))
    {
        dims.cx = (LONG)(pw * dpi / 72.0 + 0.5);
        dims.cy = (LONG)(ph * dpi / 72.0 + 0.5);
    }
    return hr;
}
```

2.9 PXCv_GetPageRotation



PXCv_GetPageRotation

PXCv_GetPageRotation retrieves the rotation angle of pages. The angle is always a multiple of ninety degrees.

```
HRESULT PXCv_GetPageRotation(  
    PXVDocument Doc,  
    DWORD page_num,  
    LONG* angle  
);
```

Parameters

Doc

[in] Specifies a document that [PXCv_Init](#)^[27] created.

page_num

[in] Specifies the zero-based page number from which to retrieve rotation information.

angle

[out] Pointer to the LONG variable that receives the rotation angle. Possible results are:

- **0** - no rotation.
- **90** - page is rotated ninety degrees clockwise.
- **180** - page is rotated one hundred and eighty degrees.
- **270** - page is rotated ninety degrees counter-clockwise.

Please note that all functions and parameters are case-sensitive.

Return Values

If the function fails then the return value is an [error code](#).^[49]

If the function succeeds then the return value is DS_OK, or a different value that isn't an error code.

2.10 PXCv_GetPagesCount



PXCv_GetPagesCount

PXCv_GetPagesCount retrieves the page count of documents.

```
HRESULT PXCv_GetPagesCount (  
    PXVDocument Doc,  
    DWORD* count  
);
```

Parameters

Doc

[in] Specifies a document that [PXCv_Init](#)^[27] created.

count

[out] Pointer to a DWORD variable into which the page count is returned.

Please note that all functions and parameters are case-sensitive.

Return Values

If the function fails then the return value is an [error code](#).^[49]

If the function succeeds then the return value is DS_OK, or a different value that isn't an error code.

2.11 PXCv_GetPermissions



PXCv_GetPermissions

PXCv_GetPermissions extracts the encryption level and permission settings of documents.

```
HRESULT PXCv_GetPermissions(  
    PXVDocument Doc,  
    DWORD* enclevel,  
    DWORD* permFlags  
);
```

Parameters

Doc

[in] Specifies a document that [PXCv_Init](#)^[27] created.

enclevel

[out] Specifies a pointer to a DWORD variable that receives the encryption level information of the document. The value will be either 40 or 128.

permFlags

[out] Specifies a pointer to a DWORD variable that receives the permission flag information of the document.

Please note that all functions and parameters are case-sensitive.

Return Values

If the function fails then the return value is an [error code](#).^[49]

If the function succeeds then the return value is DS_OK, or a different value that is not an error code.

2.12 PXCv_Init



PXCv_Init

PXCv_Init creates new PDF objects that the majority of functions in the **PDF_XChange Editor Simple SDK** require.

```
HRESULT PXCv_Init(  
    PXVDocument* pDoc,  
    LPCSTR Key,  
    LPCSTR DevCode  
);
```

Parameters

pDoc

Pointer to a **PXVDocument** variable that will receive the PDF object.

Key

[in] Pointer to a null-terminated string that contains the license key. This parameter can be set to **NULL**, in which case the library will operate in evaluation mode. (Permanent watermarks will be printed on all output).

DevCode

[in] Pointer to a null-terminated string that contains the developer code. If this parameter is absent/invalid, then demo labels will be added to all generated pages. Please note that *pDevCode* is only needed when the older style license keys are used. If a new style of key is being used then the *pDevCode* parameter should be **NULL** or just an empty string. This is because the new style keys include the information necessary for the *pDevCode* parameter, but we must retain the property as there are still users who have the older style license keys.

Please note that all functions and parameters are case-sensitive.

Return Values

If the function succeeds then the return value is **DS_OK**, and a variable pointer to *pDoc* will contain the valid PDF object.

If the function fails then the return value is an [error code](#).⁴⁹

Example (C++)

```
PXVDocument    hDocument = NULL;
// Please note - RegCode and DevCode are case sensitive
LPCSTR regcode = "<Your serial/keycode code here>";
LPCSTR devcode = "<Your developer's code here>";
HRESULT res = PXCv_Init(&hDocument, regcode, devcode);
if (IS_DS_FAILED(res))
    return res;

...
PXCv_Delete(hDocument);
```

2.13 PXCv_ReadDocumentFromIStream



PXCv_ReadDocumentFromIStream

PXCv_ReadDocumentFromIStream uses an **IStream** interface to read documents.

```
HRESULT PXCv_ReadDocumentFromIStream(  
    PXVDocument Doc,  
    IStream* stream,  
    DWORD Flags  
);
```

Parameters

Doc

[in] Specifies a document that [PXCv_Init](#)^[27] created.

stream

[in] Specifies a pointer for the stream that loads the PDF document.

Flags

[in] This parameter is reserved for future use and should be set to 0.

Please note that all functions and parameters are case-sensitive.

Return Values

If the function succeeds then the return value is DS_OK.

If the function fails then the return value is an [error code](#).^[49]

If the function return value is equal to [PS_ERR_DocEncrypted](#)^[50] then [PXCv_CheckPassword](#)^[10] and [PXCv_FinishReadDocument](#)^[18] must be used to provide a password.

2.14 PXCv_ReadDocumentFromMemory



PXCv_ReadDocumentFromMemory

PXCv_ReadDocumentFromMemory reads documents from memory buffers.

```
HRESULT PXCv_ReadDocumentFromMemory(  
    PXVDocument Doc,  
    const BYTE* mem,  
    UINT size,  
    DWORD Flags  
);
```

Parameters

Doc

[in] Specifies a document that [PXCv_Init](#)^[27] created.

mem

[in] Pointer to a memory buffer that contains the document to be opened.

size

[in] Specifies the size (in bytes) of the buffer to which *mem* points.

Flags

[in] This parameter is reserved for future use and should be set to 0.

Please note that all functions and parameters are case-sensitive.

Return Values

If the function succeeds then the return value is DS_OK.

If the function fails then the return value is an [error code](#).^[49]

If the function return value is equal to [PS_ERR_DocEncrypted](#)^[50] then [PXCv_CheckPassword](#)^[10] and [PXCv_FinishReadDocument](#)^[18] must be used to complete the reading and parsing of the document.

Comments

Memory blocks are passed to the function and should not be released until the function [PXCv_Delete](#)¹¹ has been called.

2.15 PXCv_ReadDocumentW



PXCv_ReadDocumentW

PXCv_ReadDocumentW reads documents from specified PDF files.

```
HRESULT PXCv_ReadDocumentW(  
    PXVDocument Doc,  
    LPCWSTR pwFileName,  
    DWORD Flags  
);
```

Parameters

Doc

[in] Specifies a document that [PXCv_Init](#)^[27] created.

pwFileName

[in] Specifies a pointer to a null-terminated UNICODE string that contains the fully qualified path to the file.

Flags

[in] This parameter is reserved for future use and should be set to 0.

Please note that all functions and parameters are case-sensitive.

Return Values

If the function succeeds then the return value is DS_OK.

If the function fails then the return value is an [error code](#).^[49]

If the function return value is equal to [PS_ERR_DocEncrypted](#)^[50] then [PXCv_CheckPassword](#)^[10] and [PXCv_FinishReadDocument](#)^[18] must be used to complete the reading and parsing of the document.

Example (C++)


```
// Generic example on how to read the document
PXVDocument hDocument = NULL;
// Please note - RegCode and DevCode are case sensitive
LPCSTR regcode = "<Your serial/keycode code here>";
LPCSTR devcode = "<Your developers' code here>";
HRESULT res = PXCv_Init(&hDocument, regcode, devcode);
if (IS_DS_FAILED(res))
    return res;
hr = PXCv_ReadDocumentW(hDocument, FileName, 0);
if (IS_DS_FAILED(hr))
{
    if (hr == PS_ERR_DocEncrypted)
    {
        while (IS_DS_FAILED(hr))
        {
            BYTE* Password;
            DWORD PassLen;
            // Obtain password (i.e. showing some dialog)

            // ...

            // Check password
            hr = PXCv_CheckPassword(hDocument, Password, PassLen);
        }
        // Finish read document
        hr = PXCv_FinishReadDocument(hDocument, 0);
        if (IS_DS_FAILED(hr))
        {
            PXCv_Delete(hDocument);
            // In this case document seems to be corrupted
            // ...
        }
    }
    else
    {
        PXCv_Delete(hDocument);
        // In this case document seems to be corrupted
        // ...
    }
}
// In this place the document is completely read.
```

2.16 PXCv_ReleaseCachedData



PXCv_ReleaseCachedData

PXCv_ReleaseCachedData releases cached document data.

```
HRESULT PXCv_ReleaseCachedData(  
    PXVDocument Doc,  
    DWORD dwFlags  
);
```

Parameters

Doc

[in] Specifies a document that [PXCv_Init](#)^[27] created.

dwFlags

[in] Specifies the cached content to be freed. The flag **pxvrcd_ReleaseDocumentFonts** is the only flag available for this parameter, and it features the value **0x0002**. See [PXCv_ReleasePageCachedData](#)^[36] for further information on this parameter.

Please note that all functions and parameters are case-sensitive.

Return Values

If the function succeeds then the return value is DS_OK.

If the function fails then the return value is an [error code](#).^[49]

Comments

- This function clears all cached data for the document, which means the next rendering operations will require re-reading and conversion of some data. However, clearing cached data may free a significant quantity of used memory. Therefore a call to this function is recommended after several pages have been rendered, especially if they will not be reused.

- The PDF rasterizer requires significant memory usage for many operations, including: sequences of rendering operators, sharing fonts between pages for text rendering, sharing non-embedded fonts between documents and sharing images between pages. All of these objects must be converted into internal, rasterized representations before being used, which is likely to be a time-consuming operation. The PDF rasterizer keeps all objects as internal representations in order to accelerate page rendering. This is most significant when several parts of the same page are rendered sequentially. This is because it means that some objects will not require repeated conversion during subsequent rendering operations. However, some objects require a lot of memory - for example a "simple" page of text may contain several thousand rendering operators - therefore it may become necessary to free cached objects in order to free used memory. Two functions are provided to achieve this: [PXCv_ReleaseCachedData](#)^[34] and [PXCv_ReleasePageCachedData](#).^[36]
-

2.17 PXCv_ReleasePageCachedData



PXCv_ReleasePageCachedData

This function releases page-specific, cached data for one document page. (It also contains optional functionality to release global/shared resources used subsequently to the initial release of data. See **Comments** for further information).

```
HRESULT PXCv_ReleasePageCachedData (
    PXVDocument Doc,
    DWORD page_num,
    DWORD dwFlags
);
```

Parameters

Doc

[in] Specifies a document that [PXCv_Init](#)^[27] created.

page_num

[in] Specifies the zero-based page number for which cached data should be released.

dwFlags

[in] Specifies the cached content to be freed. Any combination of the following flags is possible:

Name	Value	Meaning
pxvrcd_ReleaseDocumentImages	0x0001	Release used images.
pxvrcd_ReleaseDocumentFonts	0x0002	Release used embedded fonts.

pxvrcd_ReleaseGlobalFonts	0x0004	Release used global (unembedded) fonts.
----------------------------------	---------------	---

Please note that all functions and parameters are case-sensitive.

Return Values

If the function succeeds then the return value is DS_OK.

If the function fails then the return value is an [error code](#).^[49]

Comments

- This function releases data used to render a specified page (as opposed to all cached document data). If *dwFlags* is zero (0) then only the content-rendering operators for the page specified will be released. This function is recommended when a page has been rendered that is unlikely to be rendered again soon. Additionally, it is recommended that the **pxvrcd_ReleaseDocumentImages** flag is used to call [PXCv_ReleaseCachedData](#)^[34], as images are not usually shared between adjacent pages.
- The PDF rasterizer requires significant memory usage for many operations, including: sequences of rendering operators, sharing fonts between pages for text rendering, sharing non-embedded fonts between documents and sharing images between pages. All of these objects must be converted into internal, rasterized representations before being used, which is likely to be a time-consuming operation. The PDF rasterizer keeps all objects as internal representations in order to accelerate page rendering. This is most significant when several parts of the same page are rendered sequentially. This is because it means that some objects will not require repeated conversion during subsequent rendering operations. However, some objects require a lot of memory - for example a "simple" page of text may contain several thousand rendering operators - therefore it may become necessary to free cached objects in order to free used memory. Two functions are provided to achieve this: [PXCv_ReleaseCachedData](#)^[36] and [PXCv_ReleasePageCachedData](#).^[36]

2.18 PXCv_SetCallback



PXCv_SetCallback

PXCv_SetCallback sets the callback function used during the PDF rasterization process.

```
HRESULT PXCv_SetCallback(  
    PXVDocument Doc,  
    PXV36_CALLBACK_FUNC pProc,  
    LPARAM UserData  
);
```

Parameters

Doc

[in] Specifies a document that [PXCv_Init](#)^[27] created.

pProc

[in] Specifies the callback function, which must be defined as:

```
typedef BOOL (__stdcall *PXV36_CALLBACK_FUNC) (DWORD dwStage, DWORD dwLevel,
```

The first parameter of this function indicates the callback state; the second indicates the progress level (see below), and the third will always have the same value as that passed in *UserData*.

Callback Function's State Constants Table

Constant	Value	Meaning of Level
PXCVCib_Start	1	MaxVal - maximum value of the level which will be passed.
PXCVCib_Processing	2	Current progress level - any value from 0 to MaxVal .

PXCVClb_Finish	3	Any value from 0 to MaxVal (if all levels are passed then the value is MaxVal). This constant can be ignored if desired.

Please note that the callback function should return TRUE (any non-zero value) to continue processing or FALSE (zero) to abort the operation.

UserData

[in] Specifies a user-defined callback parameter to be passed as a third parameter to the function specified by *pProc*.

Please note that all functions and parameters are case-sensitive.

Return Values

If the function succeeds then the return value is DS_OK.

If the function fails then the return value is an [error code](#).⁴⁹

2.19 PXV_CommonRenderParameters



PXV_CommonRenderParameters

The **PXV_CommonRenderParameters** structure defines drawing parameters for the functions [PXCv_DrawPageToDC](#)^[12] and [PXCv_DrawPageToDIBSection](#).^[14]

```
typedef struct _PXV_CommonRenderParameters {
    LPRECT WholePageRect;
    LPRECT DrawRect;
    DWORD Flags;
    DWORD RenderTarget;
} PXV_CommonRenderParameters;
```

Members

WholePageRect

Specifies the rectangular area in which the PDF page rectangle will be drawn. See **Comments** for further information.

DrawRect

Specifies the rectangular portion of the PDF page to be drawn. If this field is NULL then the entire PDF page will be drawn.

Flags

This **DWORD** value is a combination of flags that defines rendering options such as rotation and vector rendering. Any combination of the following values is possible:

Flag	Value	Meaning
pxvrpf_Rotate_NoRotate	0x0000	No rotation is carried out before pages are drawn.
PXCVCib_Processing	0x0001	

		Pages are rotated ninety degrees clockwise and then drawn. This is the standard Landscape layout.
pxvrpf_Rotate_Rotate180	0x0002	Pages are rotated one hundred and eighty degrees and then drawn.
pxvrpf_Rotate_Rotate90CCW	0x0003	Pages are rotated ninety degrees counterclockwise and then drawn.
pxvrpf_UseVectorRenderer	0x0004	Specifies that vector rendering is used (as opposed to raster rendering). This feature is recommended as the print job and the resources it uses are considerably smaller as a result. The Microsoft GDI is used for rendering.
pxvrpf_RenderAsGray	0x0008	Specifies that rendering is performed in grayscale mode.
pxvrpf_EmbeddedFontAsCurves	0x0010	Specifies that all embedded fonts are rendered as curves - text functions will not be used. If this flag is not used then embedded, true-type fonts are installed temporarily for rendering. N.b. this flag has meaning only when pxvrpf_UseVectorRenderer is used - otherwise it is ignored.
pxvrpf_AllFontsAsCuves	0x0030	Specifies that all fonts are rendered as curves and without using text output API functions. N.b. this flag has meaning only when pxvrpf_UseVectorRenderer is used - otherwise it is ignored.
pxvrpf_NoTransparentBkgnd	0x0040	Specifies that raster images are filled with non-transparent white color before they are drawn. When this

		flag is not specified drawings are provided on a transparent background. N.b. this flag has meaning only when pxvrpf_UseVectorRenderer is not used.
--	--	---

RenderTarget

Specifies the rendering mode to be used. This is meaningful when the optional content exists within a document that is visible only in some rendering modes, such as push-buttons within an Adobe Acroform. Any combination of the following values is possible:

Constant	Value	Meaning
pxvrm_Viewing	0	Sets the rendering target as View . For example, this mode can be used for displaying a document on the screen.
pxvrm_Printing	1	Sets the rendering target as Print . For example, this mode is used for printing a document (or for a print preview).
pxvrm_Exporting	2	Sets the rendering target as Export . For example, this mode is used for exporting document content to a different format, such as supported raster image formats.

Please note that all functions and parameters/members are case-sensitive.

Comments

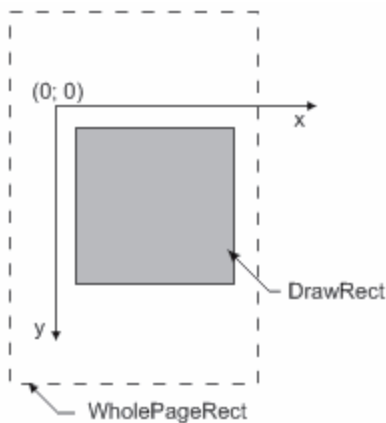


Figure 1. WholePageRect/DrawRect Example

When specific sections of PDF pages are drawn, it is necessary to specify two areas. First the rectangular area of the target's DC must be given as "**WholePageRect**," which the entire PDF page will occupy. Then the area of the PDF page drawn within **WholePageRect** must be given as "**DrawRect**". If **DrawRect** is set to NULL then the entire PDF page will be drawn within the target device's **WholePageRect** area. This simplifies the scaling of the PDF page (zoom level) and helps prevent rounding errors during the conversion from points to pixels.

Example 1

The objective is to draw a PDF page within the application window, given the following dimensions:

1. The PDF page has the dimensions 576 x 792 points (8 x 11 inches).
2. The desired "zoom level" is 400% - a scaling factor of four.
3. The application window's DC has the dimensions 600 x 800 pixels, with a DPI of 96.
4. The application window has scroll bars to control the page display. Their positions are 120 for the vertical and 180 for the horizontal, assuming that the maximum position for the horizontal scroll bar is the page's width in pixels less the window width.

The first step is to calculate the PDF page's dimensions in pixels:

$$\text{page_width_in_pixels} = (576 / 72) * 96 * 4 = 3072 \text{ pixels}$$

$$\text{page_height_in_pixels} = (792 / 72) * 96 * 4 = 4224 \text{ pixels}$$

If the dimensions of the PDF page and the zoom level remain constant then these values will also remain constant.

Therefore the **WholePageRect** and **DrawRect** values for the **PXV_CommonRenderParameters** structure are:

```
WholePageRect.left = -180; // horizontal scroll position
WholePageRect.top = -120; // vertical scroll position
WholePageRect.right = WholePageRect.left + page_width_in_pixels;
WholePageRect.bottom = WholePageRect.top + page_height_in_pixels;

DrawRect.left = 0;
DrawRect.top = 0;
DrawRect.right = 600; // the window width
DrawRect.top = 800; // the window height
```

If the zoom level is constant then **WholePageRect** depends on only the position of the scroll bars. This simplifies the calculations involved and reduces rounding errors.

Example 2

The objective is to draw a portion of a PDF page, given the following dimensions:

1. The PDF page has a width of 576 points (8 inches) and a height of 792 points (11 inches).
2. The desired portion of the page, starting from point (10, 10), is defined as:
left = 144pt;
top = 288pt;
right = 360pt;
bottom = 648pt
3. The page portion will be drawn on the target DC with a zoom factor of 200%, or a scaling factor of two.
4. The DC has a DPI of 96.

The first step is to calculate the PDF page's dimensions in pixels:

```
width = (576 / 72) * 96 * (200 / 100) = 1536 pixels;
height = 2112 pixels.
```

Therefore the width of the required page portion is:

```
portion_width = ((360 - 144) / 72) * 96 * (200 / 100) = 576 pixels;
portion_height = 960 pixels.
```

The top-left point of the drawn area must be located at the coordinates (10, 10) on the DC. Therefore the top-left point of the complete page will have the following coordinates:

```
Page-Origin_X = 10 - (144 / 72) * 96 * 200 / 100 = -374;
Page-Origin_Y = 10 - (288 / 72) * 96 * 200 / 100 = -758;
```

The required values are therefore: **WholePageRect** = {-374, -758, -354 + 1536, -758 + 2112}; and **DrawRect** = {10, 10, 10 + 576, 10 + 960}.

2.20 PXV_DrawToImageParams



PXV_DrawToImageParams

The **PXV_DrawToImage** structure formats image files that [PXCv_DrawPageToStream](#)^[16] creates.

```
typedef struct _PXV_DrawToImageParams {  
    DWORD ImageFormat;  
    DWORD Bpp;  
} PXV_DrawToImageParams;
```

Members

ImageFormat

Specifies into which file format images are stored. Possible values are:

Value	Name	Comment
0x504e4720	PNG	Specifies PNG format. This format supports transparency. Supported Bpp values: 1, 8, 24, 32.
0x4a504547	Jpeg	Specifies JPEG format. This format does not support transparency. Supported Bpp values are 8 and 24.
0x54494646	TIFF	Specifies TIFF format. Supported Bpp values are: 1, 8, 24, 32.

Flags

This member is reserved for future usage and should be set to 0.

Bpp

Specifies the bits per pixel value, which depends on the format used.

Please note that all functions and parameters/members are case-sensitive.

3 Error Handling



Error Handling

See the following pages for information on error handling:

- [Error Codes](#) ⁴⁹
 - [PXCv_Err_FormatFacility](#) ⁵⁴
 - [PXCv_Err_FormatSeverity](#) ⁵⁶
 - [PXCv_Err_FormatErrorCode](#) ⁵⁸
-

3.1 Error Codes



Error Codes

Functions return an HRESULT value in most cases. This provides a simple means to determine the success/failure of a function call.

If the most significant bit or result is set to 1 then the specified error occurred. Any other result means the function was successful. The following macros for **C/C++** apply these checks:

```
#define IS_DS_SUCCESSFUL(x)      ((x) & 0x80000000) == 0)
#define IS_DS_FAILED(x)         ((x) & 0x80000000) != 0)
```

Note: it is strongly recommended to use the same macros consistently in order to establish the success of function calls. A simple comparison with zero will often result in unreliable data, as detailed in the example below.

Please note that these macros are case-sensitive.

Functions may return warning codes that are neither equal to zero nor negative. Usually this means that the function was successful and is providing additional information about the call, for example that a default value was returned. See [Functions](#)^[9] for further information.

The **IS_DS_WARNING** macros can be used to determine if the return value generates a warning. The following code can be used to check for the error status of the [PXCV_CheckPassword](#)^[10] function:

```
HRESULT hr = PXCV_CheckPassword(doc, password, len);

if (IS_DS_FAILED(hr))
{
    // An error occurred!
    // Manage the error accordingly to provide an orderly exit from the function call
    ...
}
else
{
    // 'hr' contains a value that indicates whether the password supplied was owner or
    ...
}
```

The following code is an example of how error-checking should **not** be performed:

```
HRESULT hr = PXC_V_CheckPassword(doc, password, len);

if (hr == 0)
{
    // treat as success
    ...

    (this is not true as a positive return value was received!)
    ...
}
else
{
    // treat as error
    (Incorrect as the return value has not been adequately identified and this is unreli
    ...
}
```

The most common error codes are listed in the table below, but it should be noted that functions may return other error codes. There are three further functions available for dealing with errors that may provide additional information: [PXC_V_Err_FormatSeverity](#),^[56] [PXC_V_Err_FormatFacility](#),^[54] and [PXC_V_Err_FormatErrorCode](#).^[58] A code example is provided below the table. Please note that this function will provide information about all possible error codes.

Possible error values of PDF parser/structure:

Constant	Value	Description
S_ERR_NOTIMPLEMENTED	0x820f04b0	The function is not implemented.
PS_ERR_INVALID_ARG	0x820f0001	The argument is invalid.
PS_ERR_MEMALLOC	0x820f03e8	There is insufficient memory to perform the function.
PS_ERR_USER_BREAK	0x820f01f4	The user aborted the operation.

PS_ERR_INTERNAL	0x820f0011	There are an internal error.
PS_ERR_INVALID_FILE_FORMAT	0x820f0002	The file format is invalid.
PS_ERR_REQUIRED_PROPERTY_NOT_SET	0x820f2716	A required property is not set.
PS_ERR_INVALID_PROPERTY_TYPE	0x820f2717	The property type is invalid.
PS_ERR_INVALID_PROPERTY_VALUE	0x820f2718	The property value is invalid.
PS_ERR_INVALID_OBJECT_NUMBER	0x820f2719	The object number is invalid.
PS_ERR_INVALID_PS_OPERATOR	0x820f271c	The PS operator is invalid.
PS_ERR_UNKNOWN_OPERATOR	0x820f2787	The operator is unknown.
PS_ERR_INVALID_CONTENT_STATE	0x820f2788	The content state is invalid.
PS_ERR_NoPassword	0x820f27a8	There is no password.
PS_ERR_UnknowCryptFlt	0x820f27a9	There is an unknown crypt filter.

PS_ERR_WrongPassword	0x820f27aa	The password provided is incorrect.
PS_ERR_InvlaidObjStruct	0x820f27ab	The object structure is invalid.
PS_ERR_WrongEncryptDict	0x820f27ac	The encryption dictionary is invalid.
PS_ERR_DocEncrypted	0x820f27ad	The document is encrypted.
PS_ERR_DocNOTEncrypted	0x820f27ae	The document not encrypted.
PS_ERR_WrongObjStream	0x820f27af	The object stream is invalid.
PS_ERR_WrongTrailer	0x820f27b0	The document trailer is invalid.
PS_ERR_WrongXRef	0x820f27b1	The xref table is invalid.
PS_ERR_WrongDecodeParms	0x820f27b2	There is at least one invalid decode parameter.
PS_ERR_XRefNotFounded	0x820f27b3	The xref table was not found.
PS_ERR_DocAlreadyRead	0x820f27b4	The document is already read.
PS_ERR_DocNotRead	0x820f27b5	The document was not read.

Comments

The utility **DSErrorLookUp.exe** can provide additional error code data. This is a very useful application development tool and can be found in the installation folders. It is strongly recommended that developers utilize **DSErrorLookUp.exe** to debug their applications during the development process.

Example (C++)

```
// Using of PXCv_Err_FormatSeverity, PXCv_Err_FormatFacility, PXCv_Err_FormatErrorCode fun
char* err_message = NULL;
char* buf = NULL;
_PXCPage* p = NULL;
    // Code below should always return an error and never work
HRESULT dummyError = PXCv_ReadDocumentW(NULL, NULL, 0);
LONG sevLen = PXCv_Err_FormatSeverity(dummyError, NULL, 0);
LONG facLen = PXCv_Err_FormatFacility(dummyError, NULL, 0);
LONG descLen = PXCv_Err_FormatErrorCode(dummyError, NULL, 0);
if ((sevLen > 0) && (facLen > 0) && (descLen > 0))
{
    // Total length of the formatted text is the sum of the length for each description
    // plus some additional characters for formatting
    LONG total = sevLen + facLen + descLen + 128;
    // allocate buffer for message
    err_message = new char[total];
    err_message[0] = '\\0';
    // allocate temporary buffer
    buf = new char[total];
    // get error severity and append to message
    if (PXCv_Err_FormatSeverity(dummyError, buf, total) > 0)
        lstrcat(err_message, buf);
    lstrcat(err_message, " [");
    // get error facility and append to message
    if (PXCv_Err_FormatFacility(dummyError, buf, total) > 0)
        lstrcat(err_message, buf);
    lstrcat(err_message, "]: ");
    // and error code description and append to message
    if (PXCv_Err_FormatErrorCode(dummyError, buf, total) > 0)
        lstrcat(err_message, buf);
    ::MessageBox(NULL, err_message, "Test error", MB_OK);
    delete[] buf;
    delete[] err_message;
}
```

3.2 PXCv_Err_FormatFacility



PXCv_Err_FormatFacility

PXCv_Err_FormatFacility returns information on where errors occurred for the error code specified.

```
LONG PXCv_Err_FormatFacility(  
    HRESULT errorcode,  
    LPSTR buf,  
    LONG maxlen  
);
```

Parameters

errorcode

[in] Specifies the HRESULT that a function returned.

buf

[out] Specifies a pointer to a buffer where the error facility information is returned. Pass NULL for *buf* in order to determine the required buffer size.

maxlen

[in] Specifies the available buffer size in characters (including a null-terminating character).

Please note that all functions and parameters are case-sensitive.

Return Values

If the function fails to recognize an error code then the return value is negative.

If the function fails to retrieve information about an error code then the return value is zero.

If the function successfully retrieves information and the parameter *buf* is NULL then the return value is the number of characters required to store the description (including a null-terminating character).

If the function successfully retrieves information and the parameter *buf* is not NULL then the return value is the number of characters written to the buffer (including a null-terminating character).

3.3 PXCv_Err_FormatSeverity



PXCv_Err_FormatSeverity

PXCv_Err_FormatSeverity returns information regarding the severity of the error. See [Error Codes](#)^[49] for further information.

```
LONG PXCv_Err_FormatSeverity(  
    HRESULT errorcode,  
    LPSTR buf,  
    LONG maxlen  
);
```

Parameters

errorcode

[in] Specifies an HRESULT that a library function returned.

buf

[out] Specifies a pointer to a buffer where the error severity value is returned. Pass NULL for *buf* in order to determine the required buffer size.

maxlen

[in] Specifies the available buffer size in characters (including a null-terminating character).

Please note that all functions and parameters are case-sensitive.

Return Values

If the function fails to recognize an error code then the return value is negative.

If the function fails to retrieve information on an error code then the return value is zero.

If the function successfully retrieves information and the parameter *buf* is NULL then the return value is the number of characters required to store the description (including a null-terminating character).

If the function successfully retrieves information and the parameter *buf* is not `NULL` then the return value is the number of characters written to the buffer (including a null-terminating character).

3.4 PXCv_Err_FormatErrorCode



PXCv_Err_FormatErrorCode

PXCv_Err_FormatErrorCode provides error code information.

```
LONG PXCv_Err_FormatErrorCode(  
    HRESULT errorcode,  
    LPSTR buf,  
    LONG maxlen  
);
```

Parameters

errorcode

[in] Specifies the HRESULT that a library function returned.

buf

[out] Specifies a pointer to a buffer where the error description is returned. Pass NULL for *buf* in order to determine the required buffer size.

maxlen

[in] Specifies the available buffer size in characters (including a null-terminating character).

Please note that all functions and parameters are case-sensitive.

Return Values

If the function fails to recognize an error code then the return value is negative.

If the function fails to find information on the error code then the return value is zero.

If the function successfully retrieves information and the parameter *buf* is NULL, then the return value is the number of characters required to store the description (including a null-terminating character).

If the function successfully retrieves information and the parameter *buf* is not NULL, then the return value is the number of characters written to a buffer (including a null-terminating character).

- E -

Error Codes 49
Error Handling 48

- F -

Functions 9

- I -

Installation 7
Introduction 5

- P -

PXCV_CheckPassword 10
PXCV_Delete 11
PXCV_DrawPageToDC 12
PXCV_DrawPageToDIBSection 14
PXCV_DrawPageToStream 16
PXCV_Err_FormatErrorCode 58
PXCV_Err_FormatFacility 54
PXCV_Err_FormatSeverity 56
PXCV_FinishReadDocument 18
PXCV_GetDocumentInfoW 19
PXCV_GetPageDimensions 21
PXCV_GetPageRotation 23
PXCV_GetPagesCount 25
PXCV_GetPermissions 26
PXCV_Init 27
PXCV_ReadDocumentFromIStream 29
PXCV_ReadDocumentFromMemory 30
PXCV_ReadDocumentW 32
PXCV_ReleaseCachedData 34
PXCV_ReleasePageCachedData 36
PXCV_SetCallback 38
PXV_CommonRenderParameters 40
PXV_DrawToImageParams 46

- S -

System Requirements 8

- W -

Welcome 4